




B-15

BOPP PLAIN FILM

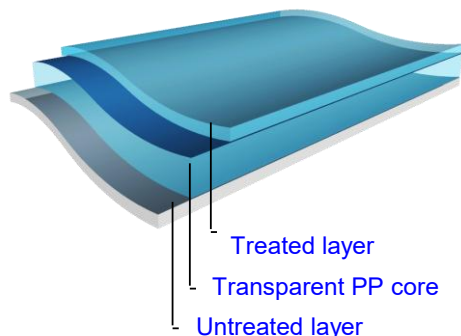

Description:

This film is designed for flower wrapping, gift wrapping, decorative and industrial application. Excellent clarity & flatness. Available in one side, both side and without treatment in roll.

Characteristics :

Clarity
Flatness and strength
Printability

TECHNICAL DATA

TYPICAL PROPERTIES	UNIT	TEST METHODS	TYPICAL VALUE					
THICKNESS	Micron	Progage	20	25	28	30	40	50
YIELD	m ² /kg	-	54.95	43.96	39.25	36.63	27.47	21.98
DENSITY	g/cm ³	ASTM D-1505	0.91					
AVERAGE THICKNESS VARIATION	%	ASTM E-252	± 3					
KINETIC C.O.F.	NT/NT	ASTM D-1894	0.4 - 0.6					
GLOSS (Angle 45°)	% (min)	ASTM D-2457	85					
HAZE	% (max)	ASTM D-1003	1.5					2.0
WETTING TENSION	Dyne/cm (min)	ASTM D-2578	38					

DESCRIPTION OF SUPPLY

PAPER CORE I.D.	51 mm(2in.), 77 mm (3 in.)
ROLL O.D.	max. 800 mm
WIDTH RANGE	100 mm - 1,500 mm. (other width on request), Allowance 0, +3 mm
COMBINATION WIDTH	6,000 mm. or 8,000 mm.
LENGTH RANGE	STANDARD 500 m., 1,000 m., 2,000 m. (other length on request)
JOINT	maximum 10% per order
SHEET CUT	
WIDTH	300 – 1000 mm
LENGTH	400 – 1000 mm (other length on request)

Food approval : Complied with US FDA & EU regulations (on request).

Storage condition: Should be kept in dry storage with temperature 30°C - 40°C.

Disclaimer:

The information provided above is accurate to the best of our knowledge. It is however suggested that the customer confirms these values and product compatibility prior to their use. Thai Future Incoporation PCL offers no guarantees nor accepts any responsibility for the fitness of the product for any particular use.

9-Oct-2023