




บริษัท ไทยฟิวเจอร์อินคอร์ปอเรชั่น จำกัด (มหาชน)

THAI FUTURE INCORPORATION PUBLIC COMPANY LIMITED

A CERTIFIED ISO 9001 / ISO 14001 COMPANY

B-22A

BOPP Co-Ex Cigarette Wrapping One Side H/S

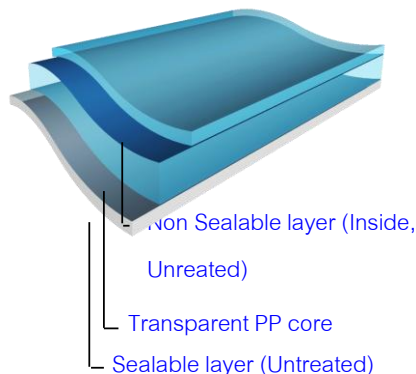

Description:

This film is special formulated for 2nd over wrapping application such as 2nd wrapping for cigratte box. It is designed to suit high speed automatic machine.

TFI film provides low friction and high stiffness properties, with exceptional low heatseal temp & high seal strength on both side

Characteristics :

High speed bundle over wrapping

Consistent slip

High tensile strength & stiffness

Good barrier properties

TECHNICAL DATA

TYPICAL PROPERTIES	UNIT		TEST METHODS	TYPICAL VALUE
THICKNESS	Micron		Progage	31
YIELD	m ² /kg		-	35.44
DENSITY	g/cm ³		ASTM D-1505	0.91
AVERAGE THICKNESS VARIATION	%		ASTM E-252	± 3
TENSILE STRENGTH	kg/mm ² (min)	MD	ASTM D-882	15
		TD		24
ELONGATION AT BREAK	% (max)	MD	ASTM D-882	180
		TD		70
THERMAL SHRINKAGE (120°C 15min.)	% (min)	MD	ASTM D-1204	3.0
		TD		4.0
SEALING RANGE	°C		1 BAR 1 SEC	115 – 140
SEALING STRENGTH	g/15mm (min)		-	240
	g/25.4mm (min)		-	400
KINETIC C.O.F.	NT/NT (max)		ASTM D-1894	0.30
GLOSS (Angle 45°)	% (min)		ASTM D-2457	85
HAZE	% (max)		ASTM D-1003	3.0

DESCRIPTION OF SUPPLY

PAPER CORE I.D.	77 mm (3 in.) 153 mm (6 in.)
ROLL O.D.	max. 350 mm
WIDTH RANGE	100 mm - 400 mm. (other width on request), Allowance 0, +3 mm
COMBINATION WIDTH	6,000 mm.
LENGTH RANGE	STANDARD 2,000 m., 4,000 m. (other length on request)
JOINT	maximum 10% per order

Food approval : Complied with US FDA & EU regulations (on request).

Storage condition: Should be kept in dry storage with temperature 30°C - 40°C.

Disclaimer:

The information provided above is accurate to the best of our knowledge. It is however suggested that the customer confirms these values and product compatibility prior to their use. Thai Future Incorporation PCL offers no guarantees nor accepts any responsibility for the fitness of the product for any particular use.

9-Oct-2023